DRAFT

4B PROJECTS

LOC08 Phase 3 - Plots C1 & Plot E3-E5
Cost Model Nr 1
30th January 2026
Maidstone Investment Holding

RICS Regulated by RICS

Quality Control

Document Title	Location	Date	Issued to	Prepared by	Approved by
Cost Model Nr 1	25-UK-009	29/01/2026	Maidstone Inv. Hold.	T McAuliffe	D Mitchell

Issued By:
Dean Mitchell
Partner

Mobile: 07491 723341
E-mail: dmitchell@4bprojects.com
Web: www.4bprojects.com

Contents

	Page
1.0 Introduction	1
2.0 Areas	1
3.0 Proposed Scheme Plot C1 Proposed Scheme Plot E3-E5	3
4.0 Exclusions	9
5.0 TPI & Benchmarking	11
A Appendix A - Drawings	A
B Appendix B - Benchmarks	B

Introduction

This report has been prepared by 4B at the request of Maidstone Investment Holding to provide an indication of the likely construction cost to undertake the redevelopment to LOC08 Phase 3 as directed by the PRC Group drawings dated 26 June 2025.

As detailed in the table below the cost for Plot C01 has been estimated at a cost of **£7,860,945** which equates to **£148.18/m2**. However, if you focus purely on the logistical centre and car park (excluding earth movement tasks) the cost is **£5,656,283** and results in a cost per ft2 of **£106.62/ft2** which is comparable to market and industry benchmarks as detailed in the latter sections of this report:

Item	Description	Plot C01		Plots E3, E4 & E5	
		Total Cost (£)	£/ft2	Total Cost (£)	£/ft2
	Gross Floor Area:		*53,050*		*30,755*
1	Substructure (incl. Surface Strip)	710,000	13.38	410,000	13.33
2	Frame & Upper Floors	520,000	9.80	300,000	9.75
3	Roof	430,000	8.11	250,000	8.13
4	External Walls	980,000	18.47	570,000	18.53
5	Internal Walls & Partitions	290,000	5.47	210,000	6.83
6	Internal Stair Core	24,000	0.45	72,000	2.34
7	Wall Finishes	30,000	0.57	20,000	0.65
8	Floor Finishes	5,400	0.10	3,100	0.10
9	Ceiling Finishes	6,100	0.11	3,500	0.11
10	Stair Finishes	20,000	0.38	30,000	0.98
11	Mechanical	75,900	1.43	40,800	1.33
12	Electrical	422,800	7.97	372,200	12.10
13	Sub-Total	3,514,200	66.24	2,281,600	74.19
14	Loading Bay & Car Park	1,253,000	23.62	623,000	20.26
15	**Sub-Total**	**4,767,200**	**89.86**	**2,904,600**	**94.44**
16	Preliminaries @ 13% & OH&P @ 5%	889,083	16.76	541,708	17.61
17	Design Reserve & Construction Contingency	Excl.		Excl.	
18	**Total Asset Costs (including Prelims and OH&P)**	**5,656,283**	**106.62**	**3,446,308**	**112.06**
19	Site Abnormals incl. Earth Movement	1,858,122	35.03	1,120,603	36.44
20	Preliminaries @ 13% & OH&P @ 5%	346,540	6.53	208,992	6.80
21	Design Reserve & Construction Contingency	Excl.		Excl.	
22	**Total Enabling Works (incl. Prelims and OH&P)**	**2,204,662**	**41.56**	**1,329,595**	**43.23**
23	**Total Asset & Enabling (incl. Prelims & OH&P)**	**7,860,945**	**148.18**	**4,775,903**	**155.29**

As detailed in the table above the cost for Plots E3, E4 & E5 have been estimated at a cost of **£4,775,903** which equates to **£155.29/m2**. However, if you focus purely on the logistical centres and car park (excl. site abnormal tasks) the cost is **£3,446,308** and results in a cost per ft2 of **£112.06/ft2** which is above average for industry benchmarks. The reason for this is because these smaller units (ranging from 8,930ft2 - 11,785ft2) lose efficiency, as a greater number of roller shutters, stair cores and lifts are required, when compared to the larger unit at Plot C01 which is 53,050ft2.

The proposed scheme areas have been taken from the aforementioned document. At this early stage, areas carry with them inherent inaccuracy and will need to be verified at the next stage.

The Cost Model assumes the works will be Competitively Tendered on a Two Stage Fixed Price Lump Sum using a JCT Design & Build Form of Contract.

This Cost Model has been prepared solely for the use by Maidstone Investment Holding as the client body and should not be relied upon by any third party.

The measurements contained in this document should not be relied upon for any purpose other than the formulation of the Cost Model itself.

Areas

Areas	GIA m²	NIA m²	GIA ft²	NIA ft²
Plot C1				
Ground Floor	4,496	4,496	48,400	48,400
First Floor	432	432	4,650	4,650
Total	4,928	4,928	53,050	53,050
Plots E3, E4, E5				
Ground Floor	2,314	2,314	24,905	24,905
First Floor	543	543	5,850	5,850
Total	2,857	2,857	30,755	30,755

Proposed Scheme - Costs for Plot C1 only

Description	Quantity	Unit	Rate	£
Allowance for surface strip and reduce levels	53,050	ft²	3.18	170,000
- Substructure, cut and fill including disposal off site, strip foundations, reinforced concrete ground slab including dpm, ground beams and column bases, power floated	53,050	ft²	10.12	540,000
- Frame and Upper Floors, steel propped portal frame, cold rolled purlins, surface treatments equating to 45kg/m2, intumescent fire protection to steelwork, allowance for miscellaneous works, protecting columns	53,050	ft²	9.76	520,000
- Roof, built up aluminium roof cladding containing 70% recycled material with 180mm thick insulation, rooflights, man safe, rainwater drainage, aluminium gutters and downpipes	53,050	ft²	8.09	430,000
- External Wall, Windows and Doors, built up wall cladding with 130mm insulation, inner lead of 140mm thick fairfaced blockwork, high steel sectional overhead doors, aluminium single entrance doors, coated aluminium recycled double glazing window system, polycarbonate canopy entrance, roller shutter doors for lorry access	53,050	ft²	18.47	980,000
- Internal Walls and Partitions and Doors, fire wall including fireproofing between blockwork and roof, metal stud partitions and laminated faced internal door set with softwood frames and ironmongery	53,050	ft²	5.53	290,000
- Internal Stair Cores; pre-cast concrete	2	nr	12,000.00	24,000
- Wall Finishes, emulsion paint to blockwork wall surfaces and ceramic wall tiles to WC areas	53,050	ft²	0.50	30,000
- Floor Finishes, screed and non-slip vinyl to WC areas.	53,050	ft²	0.10	5,400
- Ceiling Finishes, moisture-resistant plasterboard to WC	53,050	ft²	0.11	6,100

Proposed Scheme - Costs for Plot C1 only

Description	Quantity	Unit	Rate	£
- Internal Stair Cores; finishes to include carpet and stainless steel balustrades	2	nr	10,000.00	20,000
- Sanitary Appliances, WC suite including all sanitary and fittings	53,050	ft²	0.79	40,000
- Disposal Installations, waste, soil and vent installation, uPVC pipework and fittings	53,050	ft²	0.23	12,200
- Hot and Cold Water Installations, hot and cold water supplies to WC	53,050	ft²	0.45	23,700
- Electrical Installations in accordance with BS 5489, small power, basic and emergency lighting, supply to WC for ventilation, heater, external lighting	53,050	ft²	4.05	210,000
- Incoming Services, allowance for electrical and water incoming services	53,050	ft²	1.59	80,000
- Protective Installations, lightning protection	53,050	ft²	0.10	5,400
- Communication Installations, fire and intruder system	53,050	ft²	1.27	70,000
- Lift system including core construction and internal finishes	1	item	52,000.00	52,000
- Builders Work in Connection, forming holes and chases	53,050	ft²	0.10	5,400
Sub-total				**3,514,200**
<u>Loading Bay, Road and Car Park areas</u>				
- Allowance for infrastructure and external works	5,518	m2	206.01	1,140,000
Bin store	1	nr	10,000.00	10,000
Bike Storage Facility, 20 bike capacity	1	nr	12,000.00	12,000
Flood lights to loading bay	3	Nr	12,000.00	36,000
Street lighting to vehicle parking area	11	Nr	5,000.00	55,000
Sub-total				**1,253,000**

Proposed Scheme - Costs for Plot C1 only

Description	Quantity	Unit	Rate	£
Sub-Total (including Loading Bay & Warehouse)	53,050	ft2	89.86	**4,767,200**
- Preliminaries @ 13% and OH&P @ 5%	53,050	ft²	16.76	889,083
Design Reserve (3.5%) & Construction Contingencies (4%)	53,050	ft²		Excl.
Total Construction Works (excl. Enabling Works to ensure a like-for-like comparison with market testing)	**53,050**	**ft2**	**106.62**	**5,656,283**
Site Abnormals				
Allowance for cutting existing earthwork	11,385	m3	50.00	569,300
Allowance for filling with extracted material	2,000	m3	50.00	100,000
Allowance for depositing excavated material (assumed inert)	1,325	m3	50.00	66,300
Allowance for soft landscaping, assumed shrubs and tree planting	6,271	m2	15.00	94,100
Mesh security gate to the perimeter	655	m	61.00	39,900
Matching electric gate to the perimeter fence for loading bay access	1	Nr	10,000.00	10,000
Attenuation Tank; 997.5m3; including excavation	1	item	300,000	300,000
Photovoltaics to roof	1,817	m2	370.00	672,383
Retaining Wall; assumed gabion wall	22.74	m2	270.00	6,140
Sub-total				**1,858,122**
- Preliminaries @ 13% and OH&P @ 5%	53,050	ft²	6.53	346,540
Design Reserve (3.5%) & Construction Contingencies (4%)		item		Excl.
Total Site Abnormal Works to ensure a like-for-like comparison with market testing)	**53,050**		**41.56**	**2,204,662**
Total Construction Works (incl. Site Abnormal Works to ensure a like-for-like comparison with market testing)	**53,050**	**ft2**	**148.18**	**7,860,945**

(Costs at this stage are likely to be +/-10%)

Proposed Scheme - Costs for Plots E3, E4 & E5 only

Description	Quantity	Unit	Rate	£
Allowance for surface strip and reduce levels	30,755	ft²	3.18	100,000
- Substructure, cut and fill including disposal off site, strip foundations, reinforced concrete ground slab including dpm, ground beams and column bases, power floated	30,755	ft²	10.12	310,000
- Frame and Upper Floors, steel propped portal frame, cold rolled purlins, surface treatments equating to 45kg/m2, intumescent fire protection to steelwork, allowance for miscellaneous works, protecting columns	30,755	ft²	9.76	300,000
- Roof, built up aluminium roof cladding containing 70% recycled material with 180mm thick insulation, rooflights, man safe, rainwater drainage, aluminium gutters and downpipes	30,755	ft²	8.09	250,000
- External Wall, Windows and Doors, built up wall cladding with 130mm insulation, inner lead of 140mm thick fairfaced blockwork, high steel sectional overhead doors, aluminium single entrance doors, coated aluminium recycled double glazing window system, polycarbonate canopy entrance, roller shutter doors for lorry access	30,755	ft²	18.47	570,000
- Internal Walls and Partitions and Doors, fire wall including fireproofing between blockwork and roof, metal stud partitions and laminated faced internal door set with softwood frames and ironmongery	30,755	ft²	6.80	210,000
- Internal Stair Cores; pre-cast concrete	6	nr	12,000.00	72,000
- Wall Finishes, emulsion paint to blockwork wall surfaces and ceramic wall tiles to WC areas	30,755	ft²	0.50	20,000
- Floor Finishes, screed and non-slip vinyl to WC areas.	30,755	ft²	0.10	3,100
- Ceiling Finishes, moisture-resistant plasterboard to WC	30,755	ft²	0.11	3,500

Proposed Scheme - Costs for Plots E3, E4 & E5 only

Description	Quantity	Unit	Rate	£
- Internal Stair Cores; finishes to include carpet and stainless steel balustrades	3	nr	10,000.00	30,000
- Sanitary Appliances, WC suite including all sanitary and fittings	30,755	ft²	0.79	20,000
- Disposal Installations, waste, soil and vent installation, uPVC pipework and fittings	30,755	ft²	0.23	7,100
- Hot and Cold Water Installations, hot and cold water supplies to WC	30,755	ft²	0.45	13,700
- Electrical Installations in accordance with BS 5489, small power, basic and emergency lighting, supply to WC for ventilation, heater, external lighting	30,755	ft²	4.05	120,000
- Incoming Services, allowance for electrical and water incoming services	30,755	ft²	1.59	50,000
- Protective Installations, lightning protection	30,755	ft²	0.10	3,100
- Communication Installations, fire and intruder system	30,755	ft²	1.27	40,000
- Lift system including core construction and internal finishes	3	item	52,000.00	156,000
- Builders Work in Connection, forming holes and chases	30,755	ft²	0.10	3,100
Sub-total				**2,281,600**
<u>Loading Bay, Road and Car Park areas</u>				
- Allowance for infrastructure and external works	2,630	m2	206.01	540,000
Bin store	1	nr	10,000.00	10,000
Bike Storage Facility, 20 bike capacity	1	nr	12,000.00	12,000
Flood lights to loading bay	3	Nr	12,000.00	36,000
Street lighting to vehicle parking area	5	Nr	5,000.00	25,000
Sub-total				**623,000**

Proposed Scheme - Costs for Plots E3, E4 & E5 only

Description	Quantity	Unit	Rate	£
Sub-Total (including Loading Bay & Warehouse)	30,755	ft2	94.44	**2,904,600**
- Preliminaries @ 13% and OH&P @ 5%	30,755	ft²	17.61	541,708
Design Reserve (3.5%) & Construction Contingencies (4%)	30,755	ft²		Excl.
Total Construction Works (excl. Enabling Works to ensure a like-for-like comparison with market testing)	**30,755**	**ft2**	**112.06**	**3,446,308**
Site Abnormals				
Allowance for cutting existing earthwork	1,150	m3	50.00	57,500
Allowance for filling with extracted material	1,150	m3	50.00	57,500
Allowance for imported fill	2,645	m3	50.00	132,300
Allowance for soft landscaping, assumed shrubs and tree planting	4,231	m2	15.00	63,500
Mesh security gate to the perimeter	409	m	61.00	24,900
Matching electric gate to the perimeter fence for loading bay access	1	Nr	10,000	10,000
Attenuation Tank; 855m3; including excavation	1	item	300,000	300,000
Attenuation Tank; 330m3; including excavation	1	item	150,000	150,000
Photovoltaics to roof	831	m2	370.00	307,337
Retaining Wall; assumed gabion wall	65.06	m2	270.00	17,566
Sub-total				**1,120,603**
- Preliminaries @ 13% and OH&P @ 5%	30,755	ft²	6.80	208,992
Design Reserve (3.5%) & Construction Contingencies (4%)		item		Excl.
Total Site Abnormal Works to ensure a like-for-like comparison with market testing)	**30,755**		**43.23**	**1,329,595**
Total Construction Works (incl. Site Abnormal Works to ensure a like-for-like comparison with market testing)	**30,755**	**ft2**	**155.29**	**4,775,903**

(Costs at this stage are likely to be +/-10%)

Exclusions

The following headings are excluded from the Cost Model but are likely to have a cost impact and therefore should form part of the Overall Project Budget or Development Appraisal. This list is intended as a guide and cannot be relied upon to be exhaustive:

1. Site Acquisition - site or lease acquisition costs, and associated stamp duty;
2. Agents and Legal Fees and Commissions associated with site or lease acquisition;
3. Settlements with 3rd Parties - Rights of Light, Daylight/Sunlight compensation, (or associated insurances), Air Rights, Oversailing Agreements, Party Wall Awards, Stopping Up Awards, Dilapidation Costs or other 3rd Party Compensation Costs;
4. Professional and Legal Fees;
5. Site Surveys, Investigations and Monitoring Costs together with associated attendances, Wind Studies, Environmental Audits and the like;
6. Finance Costs - funding arrangement fees, facility fees, interest charges and the like;
7. Insurance - Project Policies or insurance of existing buildings by Employer,
8. Taxation, Grants and Incentives - VAT, Capital allowances or other grants and incentives;
9. Letting & Marketing Costs;
10. Inflation - the programme for the project is yet to be determined, therefore we have excluded inflation. The estimated cost included herein represents a present day fixed price.

The following items are excluded from the Cost Model, but may result in additional cost should they be required for the scheme. The necessity for these items must be reviewed with the Employer and Design Team and appropriate allowances included within the Overall Project Budget or Development Appraisal held by the Client:

1. External Utilities - dual/diverse incoming electrical supplies, temporary substations;
2. Temporary substation provision or multiple re-location of existing substations during construction;
3. Fitting out beyond a standard Category A finish within office areas, (carpets, blinds, underfloor power and floor boxes);
4. Furniture to Landlord areas - reception, lift lobbies, terraces, courtyards, building management and facilities management areas;
5. Soft Furnishings throughout, (Blinds, Curtains or the like);
6. Artwork, Planting or Branding;
7. Tenant enhancements to base build scheme;
8. IT and AV Hardware and Equipment - included only for landlord telephone installation serving reception and building management areas as well as central satellite TV installation together with riser distribution to each floor for future connection by tenant(s);
9. Telephone Equipment, PBX, Switches, Racks and network cabling infrastructure;
10. Uninterruptable Power Supplies, (UPS) systems serving electrical infrastructure;

Exclusions

11 Tenant relocation costs - relocation consultants, removal teams, IT migration costs, temporary relocations, temporary storage costs, security and lift attendances during move, protection measures during move;
12 Feature / Branded Hoarding and/or bespoke screen printed / acoustic monoflex to scaffold enclosures;
13 Currency Fluctuations associated with payment of materials in currency other than UK Sterling;
14 Phasing costs - the Cost Model is based on an assumption of one continues phase of works;
15 Working Condition Restrictions, (Section 60 or Section 61 Notices);
16 Out of hours working;
17 Novated design fees, (assume included within the Professional Fees budget with the Overall Project Budget);

The following items are excluded from the Cost Model, but may result in additional cost in the vent of specific risks materialising or the scope / specification altering from that assumed in the preparation of this Cost Model and should therefore be covered by a Project Contingency/Risk Allowance or provided for within the Overall Project Budget or Development Appraisal held by the Client:

1 Abnormal ground conditions, (contamination, obstructions, utilities), associated remediation, attendances and consequential costs;
2 Archaeological surveys, investigations and associated attendances;
3 Effect of discovery of archaeological artefacts or other antiquities together with associated attendances and consequential costs;
4 Asbestos surveys and investigations, desktop, or Demolition and Refurbishment together with associated attendances;
5 Asbestos removal, associated attendances and consequential costs;
6 Works to Party Walls;
7 Fire rated boundary glazing, (assume no external walls are constructed within the restricted zone of neighbouring buildings);
8 Allowance for affordable workspace fitting out beyond CAT A allowance already made

Tender Price Inflation

The above figures represent a present day fixed price, at January 2026 Base Date, and assumes an immediate start on site, on a fixed price, lump sum basis.

Inflation between the Base Date of this Cost Model, January 2026) and commencing works on site, (January 2027) has been excluded from this Cost Model - i.e. the Cost Model is prepared as if the works were commencing on site immediately.

Inflation during the construction period, (assumed to be in the order of 12 months), is included within the rates used to inform the Cost Model.

A feature of the next few years is likely to be the effect of tender price inflation as Contractors adjust to the likely uncertainties created by the political and economic uncertainties.

Based on our current forecasts, we would anticipate the following Tender Price Inflation for the forthcoming years:

Recent changes		Percentage change		
Date	Index	On year	On quarter	On month
1Q 2026	411	3.00%	1.00%	n/a
2Q 2026	413	3.00%	0.50%	n/a
3Q 2026	416	3.00%	0.70%	n/a
4Q 2026	420	3.20%	1.00%	n/a
1Q 2027	425	3.40%	1.20%	n/a

Benchmarking

The rates used to derive this model have been taken from benchmarked schemes of a similar size and nature to those proposed for LOC08 Phase 3.

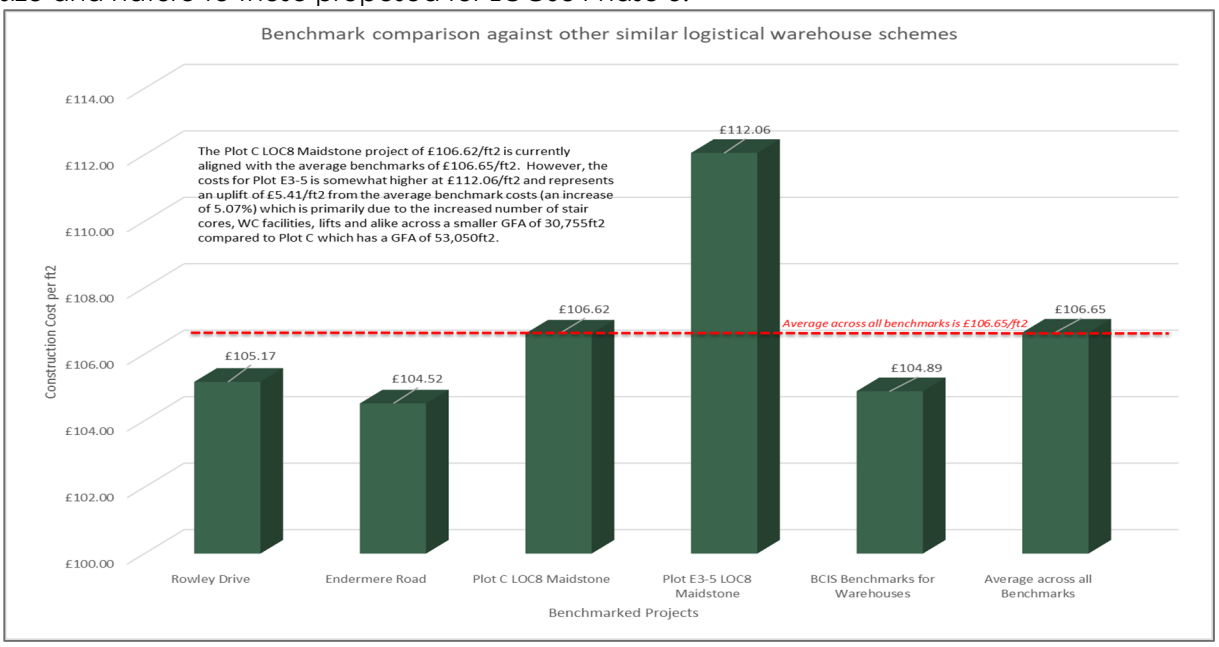

Appendix A - Drawings

Drawings

M20
Unit 3B
Unit 3A
GEA UNIT C1
GF 48,400 SQFT
FF 4,650 SQFT
TOT 53,050 SQFT
20 CYCLES
BIKE STORE
MC
Figured dimensions only are to be used. All Dimensions to be checked onsite. Differences between drawings and between drawings and specification or bills of quantities to be reported to the PRC Group.
© The copyright of the drawings and designs contained therein remains vested in the PRC Group.
Revisions
Drawn/Chkd
Date
N
KEY
Application area
Mesh security fence complete with matching gates
Proposed soft landscape
Brushed concrete service yard
Tarmac
Resin bound gravel
Concrete block paviours to vehicle areas
Car parking space
EV Car parking space
Accessible parking
MC Motorcycle parking
Gas Easement Area
PRC
Architecture
Landscape
Town Planning
Masterplanning
Urban Design
Client PRC
Project Name LOC8 - MAIDSTONE - PH3
Drawing Title PROPOSED SITE PLAN - PLOT C1
Job No 11727
Status S3
Paper Size A0_S3
Planned Date 10-SEP-25
Scale 1 : 500
Last Edited GW
Project LOC8
Originator PRC
Zone 01
Level ZZ
Type DR
Role A
Number 000003
Rev
Shortfile Name LOC8-PRC-ZZ-ZZ-M3-A-000000
Scale 1:500
0
25
50 m

30 CYCLE
BIKE STORE
MC
MC
GEA UNIT E3
GF 9,935 GQFT
FF 1,850 GQFT
TOT 11,785 GQFT
GEA UNIT E4
GF 8,090 GQFT
FF 1,950 GQFT
TOT 10,040 GQFT
GEA UNIT E5
GF 6,980 GQFT
FF 1,950 GQFT
TOT 8,930 GQFT
ASHFORD ROAD / A20
Scale 1:500
0
25
50 m
N
KEY
Application area
Mesh security fence complete with matching gates
Proposed soft landscape
Brushed concrete service yard
Tarmac
Resin bound gravel
Concrete block paviours to vehicle areas
Car parking space
EV Car parking space
Accessible parking
MC Motorcycle parking
Gas Easement Area
PRC
Architecture
Landscape
Town Planning
Masterplanning
Urban Design
PRC
LOC8 - MAIDSTONE - PH3
PROPOSED SITE PLAN - PLOT E3/4/5
11727
03
1 : 500
15-SEP-25
LOC8 - PRC - 02 - ZZ - DR - A - 000004

Appendix B - Benchmarks

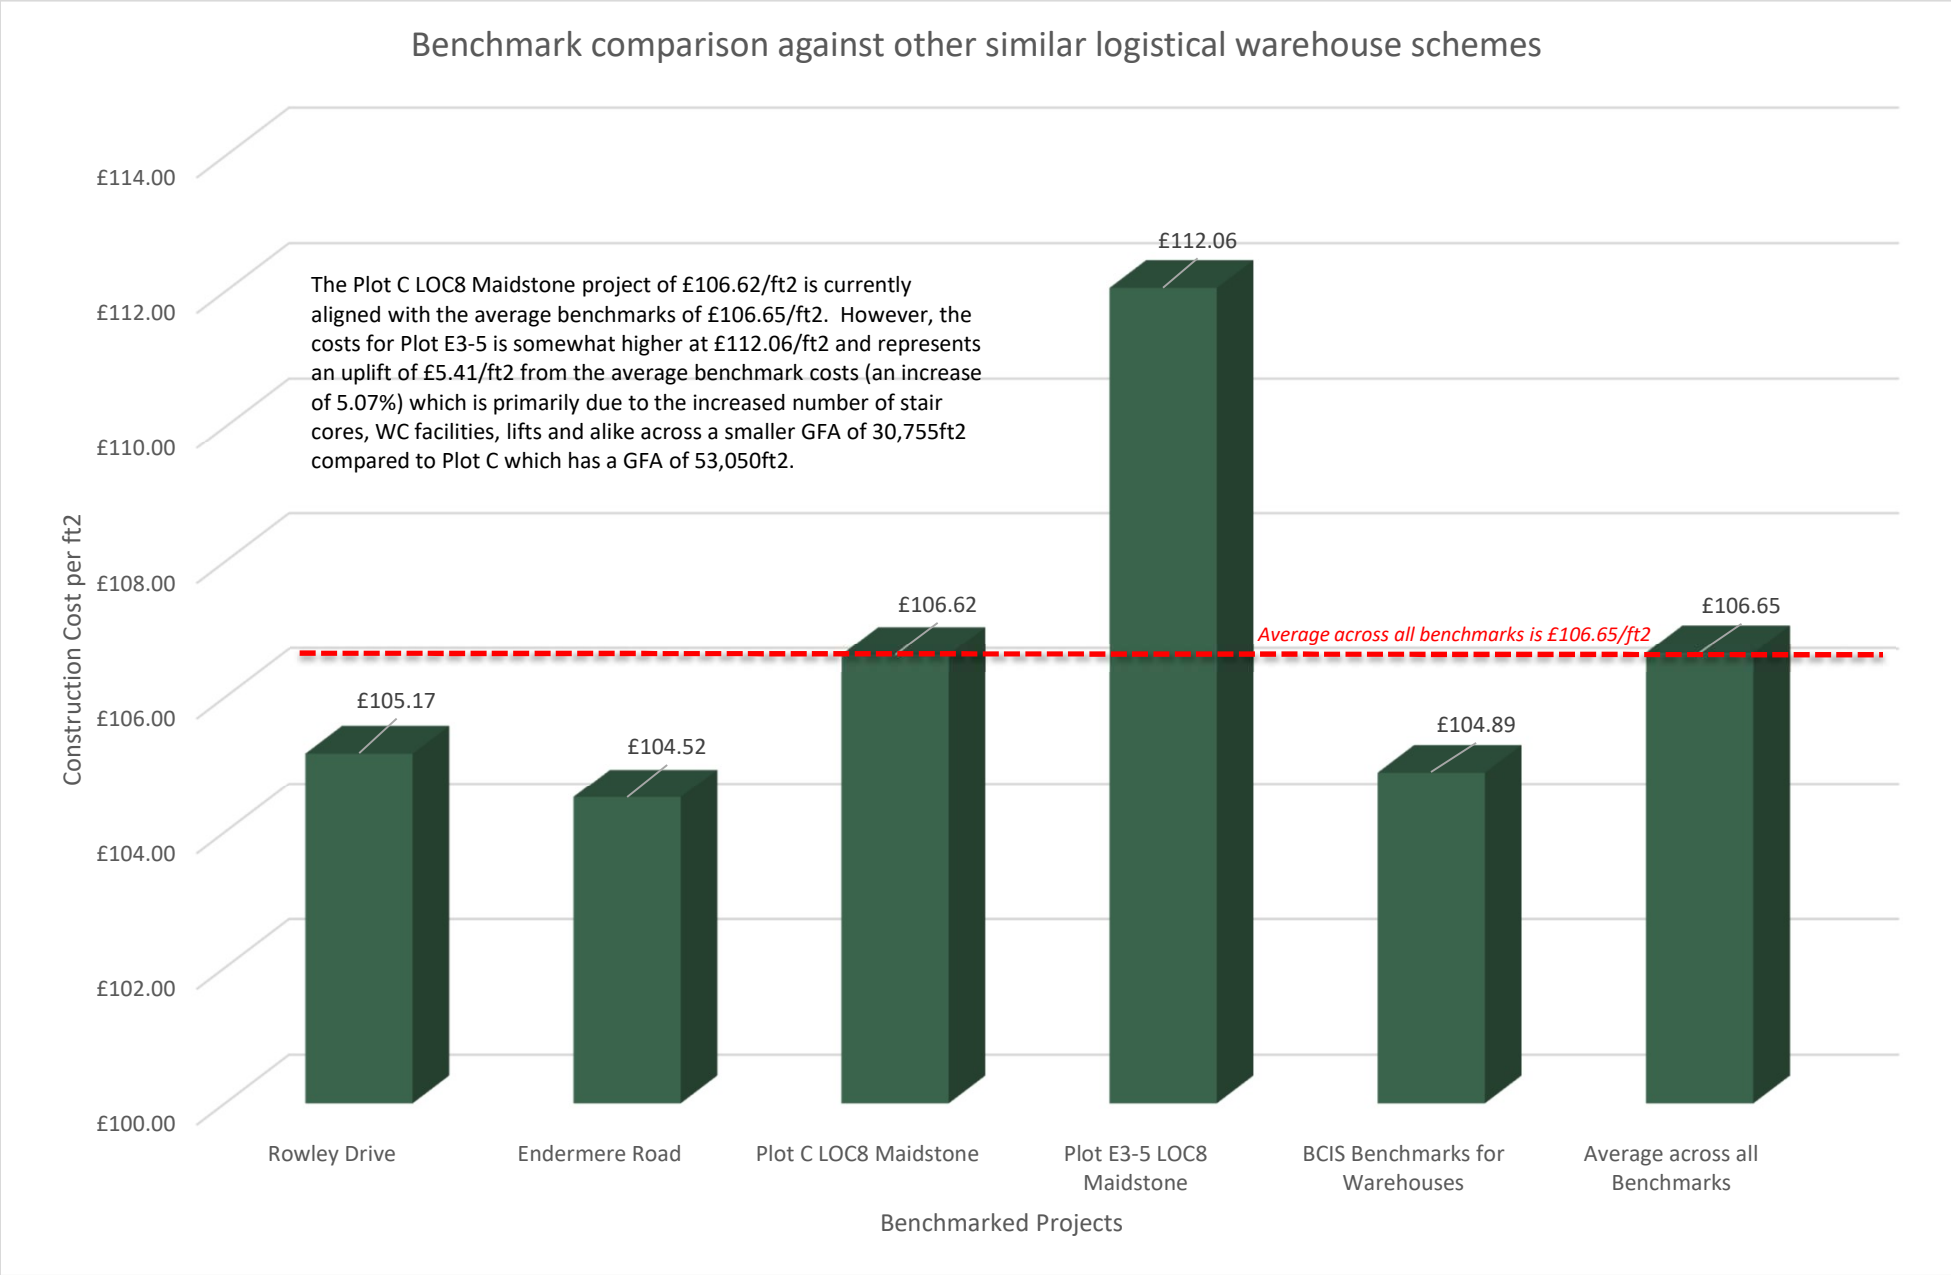
Benchmark comparison against other similar logistical warehouse schemes
£114.00
£112.00
£110.00
£108.00
£106.00
£104.00
£102.00
£100.00
Construction Cost per ft2
The Plot C LOC8 Maidstone project of £106.62/ft2 is currently aligned with the average benchmarks of £106.65/ft2. However, the costs for Plot E3-5 is somewhat higher at £112.06/ft2 and represents an uplift of £5.41/ft2 from the average benchmark costs (an increase of 5.07%) which is primarily due to the increased number of stair cores, WC facilities, lifts and alike across a smaller GFA of 30,755ft2 compared to Plot C which has a GFA of 53,050ft2.
£105.17
£104.52
£106.62
£112.06
£104.89
£106.65
Average across all benchmarks is £106.65/ft2
Rowley Drive
Endermere Road
Plot C LOC8 Maidstone
Plot E3-5 LOC8 Maidstone
BCIS Benchmarks for Warehouses
Average across all Benchmarks
Benchmarked Projects

Issued by:
Dean Mitchell
Partner

Mobile: 07491 723341
E-mail: dmitchell@4bprojects.com
Web: www.4bprojects.com